

8 7 6 5 4 3 2 1

D

D

C


C

B

B

A

A

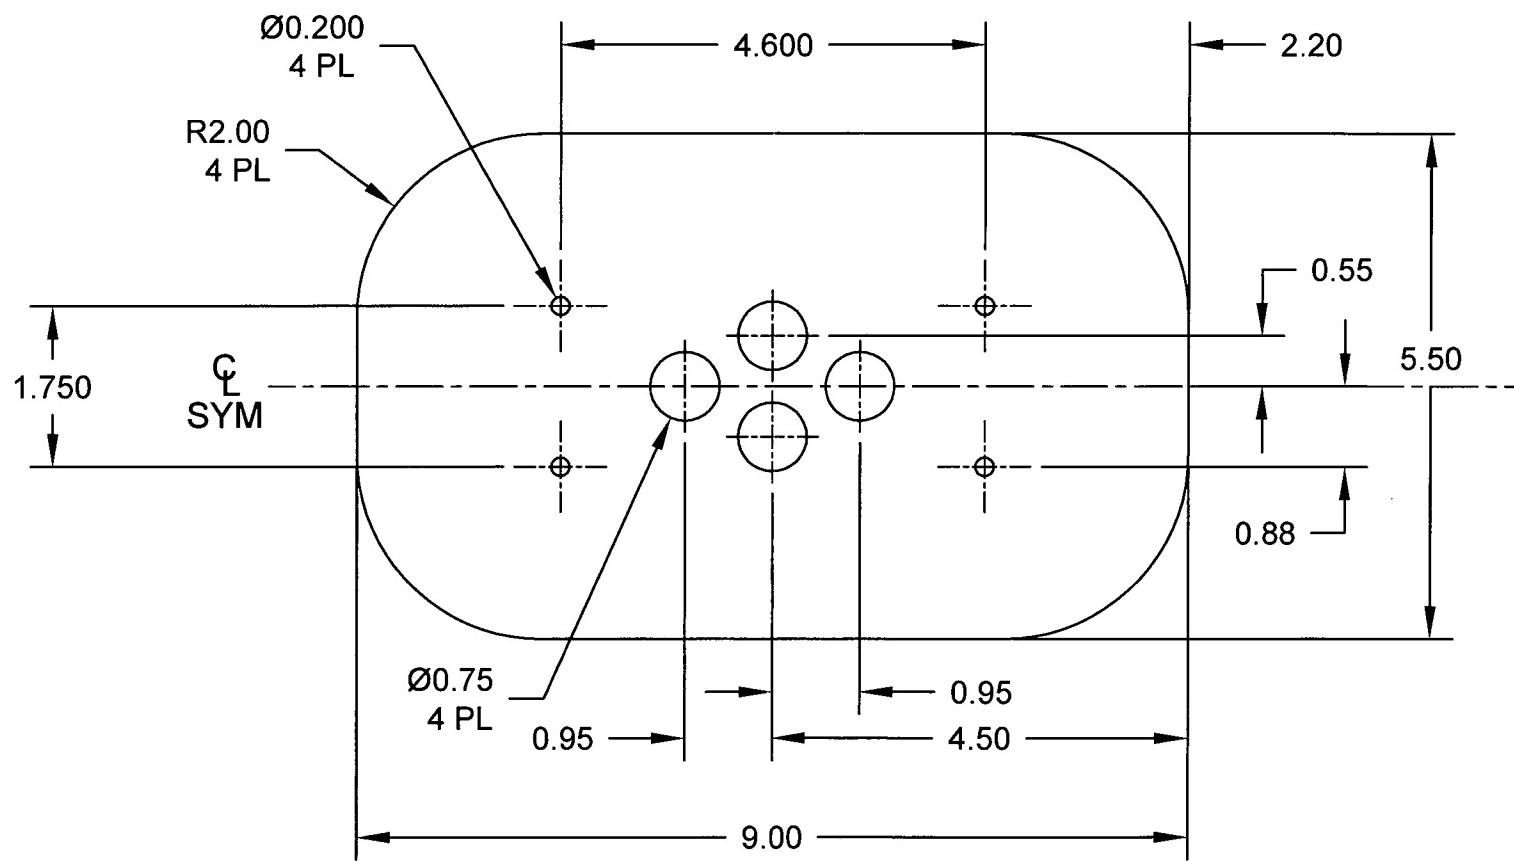

D3872-3 DOUBLER

**RELEASED**  
07/05/05 M

NOTES:

- 1) MATERIAL: 2024-T3 ALUMINUM SHEET 0.050 THICK PER AMS-QQ-A-250/4 (REF DART SPEC M2024T3S.050)  
OR 6061-T6 (OR 6061-T62) ALUMINUM SHEET 0.050 THICK PER AMS-QQ-A-250/11 (REF DART SPEC M6061T6S.050)
- 2) FINISH: CHEMICAL CONVERSION COAT PER DART QSI 005 4.1
- 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 4) UNITS: INCHES UNLESS OTHERWISE NOTED
- 5) BREAK SHARP EDGES: 0.005 TO 0.010 MAX
- 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D3872-3" AND B/N USING FINE POINT PERMANENT INK MARKER
- 7) WEIGHT: 0.5 lbs

DESIGN	KB	<b>DART AEROSPACE LTD</b>	
DRAWN	KB	HAWKESBURY, ONTARIO, CANADA	
CHECKED	##	DRAWING NO.	REV. A
MFG. APPR.	DD	D3872	SHEET 2 OF 2
APPROVED	##	TITLE	SCALE
DE APPR.	##	BOTTOM ANTENNA MOUNTING PLATE NTS	
DATE	09.01.21	COPYRIGHT © 2009 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	